

**Product List**

Galvanized

Wire diameter	Length (M)	Colour	Weight (KG)	Bracketfixed	Package (Carton)	PIC
0.7MM	50	Galvanized	0.151	Y	20	
0.7MM	100	Galvanized	0.302	Y	20	
0.9MM	50	Galvanized	0.25	Y	20	
0.9MM	100	Galvanized	0.5	Y	20	
1.1MM	50	Galvanized	0.373	Y	20	
1.1MM	100	Galvanized	0.746	Y	20	
1.3MM	50	Galvanized	0.52	Y	20	
1.3MM	100	Galvanized	1.04	Y	20	
1.5MM	50	Galvanized	0.693	Y	20	
1.8MM	50	Galvanized	0.998	Y	20	
1.4MM		Galvanized	0.5	Y	20	
1.6MM		Galvanized	0.5	Y	20	
1.8MM		Galvanized	0.5	Y	20	
2.0MM		Galvanized	0.5	Y	20	
2.2MM		Galvanized	0.5	Y	20	
2.2MM	25	Galvanized	0.746	N	10	
2.2MM	50	Galvanized	1.49	N	10	


Wire diameter	Length (M)	Colour	Weight (KG)	Bracketfixed	Package (Carton)	PIC
2.2MM	100	Galvanized	2.98	N	5	
2.4MM	25	Galvanized	0.887	N	10	
2.4MM	50	Galvanized	1.775	N	10	
2.4MM	100	Galvanized	3,55	N	5	
2.7MM	50	Galvanized	2.25	N	10	
2.7MM	100	Galvanized	4.5	N	5	
0.8MM	40	Galvanized	0.158	Springclasp	120	
0.9MM	30	Galvanized	0.147	Springclasp	120	
1.2MM	25	Galvanized	0.222	Springclasp	60	
1.3MM	22	Galvanized	0.231	Springclasp	60	
1.5MM	16	Galvanized	0.224	Springclasp	60	
1.8MM	12	Galvanized	0.24	Springclasp	60	
2.0MM	10	Galvanized	0.247	Springclasp	60	
2.2MM	9	Galvanized	0.271	Springclasp	60	
2.5MM	7	Galvanized	0.266	Springclasp	60	

PVC Coated Wire

Wire diameter	Length (M)	Colour	Weight (KG)	Bracket fixed	Package (Carton)	PIC
0.6/0.95MM	50	RAL6005	0.14	Y	20	
0.8/1.15MM	50	RAL6005	0.235	Y	20	
0.8/1.15MM	50	RAL9010	0.235	Y	20	
0.8/1.25MM	50	RAL6005	0.248	Y	20	
0.9/1.35MM	50	RAL6005	0.305	Y	20	
1.0/1.4MM	50	RAL6005	0.361	Y	20	
1.0/1.5MM	100	RAL6005	0.75	Y	20	
1.1/1.6MM	50	RAL7016	0.447	Y	20	
1.1/1.6MM	50	RAL6005	0.447	Y	20	
1.8/2.65MM	25	RAL6005	0.603	Y	20	
1.1/1.6MM	100	RAL6005	0.894	N	5	
1.2/1.8MM	100	RAL6005	1.08	N	5	
1.0/2.0MM	12.5	RAL9010	0.123	N	20	
1.0/2.0MM	25	RAL9010	0.246	N	10	
1.4/2.4MM	50	RAL6005	0.813	N	10	
1.4/2.4MM	100	RAL6005	1.62	N	5	
1.8/2.75MM	50	RAL6005	1.23	N	10	
1.8/2.75MM	100	RAL6005	2.46	N	5	
2.0/2.8MM	100	RAL6005	2.88	N	5	


Wire diameter	Length (M)	Colour	Weight (KG)	Bracket fixed	Package (Carton)	PIC
2.0/3.2MM	100	RAL6005	3.15	N	5	
2.5/3.6MM	100	RAL6005	4.59	N	5	
0.5/0.8MM	40	RAL6005	0.075	Spring clasp	120	
0.6/0.9MM	30	RAL6005	0.086	Spring clasp	120	
0.7/1.1MM	20	RAL6005	0.078	Spring clasp	120	
1.0/1.4MM	16	RAL6005	0.124	Spring clasp	60	
1.1/1.6MM	12	RAL6005	0.108	Spring clasp	60	
1.2/1.8MM	9	RAL6005	0.106	Spring clasp	60	
1.6/2.2MM	8	RAL6005	0.158	Spring clasp	60	
0.5/0.8MM-4.0/5.2MM		Any colour	5KG-500KG	Inside with plastic film and outside with hessian/Inside with plastic film and outside with woven bag		

### Cooper Wire

Wire diameter	Length (M)	Colour	Weight (KG)	Bracket fixed	Package (Carton)	PIC
0.5MM		cooper	0.05	N	200	
0.6MM		cooper	0.05	N	200	
0.8MM		cooper	0.05	N	200	
1.0MM		cooper	0.05	N	200	

1.5MM		cooper	0.05	N	200	
-------	--	--------	------	---	-----	--

### Piano Wire

Wire diameter	Length (M)	Colour	Weight (KG)	Bracket fixed	Package (Carton)	PIC
0.4MM			0.1	Aluminum shell	200	
0.5MM			0.1	Aluminum shell	200	
0.6MM			0.1	Aluminum shell	200	
0.7MM			0.1	Aluminum shell	200	
0.8MM			0.1	Aluminum shell	200	
1.0MM			0.1	Aluminum shell	200	
1.2MM			0.1	Aluminum shell	200	
1.5MM			0.1	Aluminum shell	200	
1.8MM			0.2	Aluminum shell	80	
2.0MM			0.2	Aluminum shell	80	



### Annealed Black Wire

Wire diameter	Length (M)	Colour	Weight (KG)	Bracket fixed	Package (Carton)	PIC
1.57MM		Black	3.5LB		20	

### Galvanized Wire

Made of high-quality low-carbon steel wire rod after drawing, pickling and rust removal, high temperature annealing, hot-dip galvanizing (or electro-galvanizing), cooling and other processes.

The products are widely used in various fields such as wire mesh weaving, construction bundling, handicraft production, highway guardrail, product packaging and daily civil use.

Uses:	Length (M)	Colour	Weight (KG)	Package	PIC
0.4MM- 0.7MM		galvanized	5/10/25	Inside with plastic film and outside with hessian/ Inside with plastic film and outside with woven bag	
0.8MM- 1.3MM		galvanized	5/10/25	Inside with plastic film and outside with hessian/ Inside with plastic film and outside with woven bag	
1.3MM- 4.0MM		galvanized	50/500/1000	Inside with plastic film and outside with hessian/ Inside with plastic film and outside with woven bag	


### Galfan Wire

the galvanized layer is high zinc and aluminum ,the aluminum content in galfan is 5-10%,and the zinc content is 90-95%.The corrosion resistance of its products is about 2 to 3 times that of ordinary galvanizing .At present ,Galfan galvanized wire is mainly used in gabion net products.

Wire diameter	Length(M)	Colour	Weight(KG)	Package
1.6MM	500		7.9	Spool
1.8MM	500		10	Spool
2.0MM	500		12.33	Spool

2.5MM	500		19.23	Spool
-------	-----	--	-------	-------

**Cut wire/straightening wire**

Wire diameter	Length(M)	Colour	Weight (KG)	Package	PIC
1.4mm	0.8-6	galvanized/annealed black wire	25kg/bundle		
1.6mm	0.8-6	galvanized/annealed black wire	25kg/bundle		
1.8mm	0.8-6	galvanized/annealed black wire	25kg/bundle		
2.0mm	0.8-6	galvanized/annealed black wire	25kg/bundle		
2.2mm	0.8-6	galvanized/annealed black wire	25kg/bundle		
2.5mm	0.8-6	galvanized/annealed black wire	25kg/bundle		
2.8mm	0.8-6	galvanized/annealed black wire	25kg/bundle		
3.15mm	0.8-6	galvanized/annealed black wire	25kg/bundle		

**Net type fence**

**Rigid Mesh**

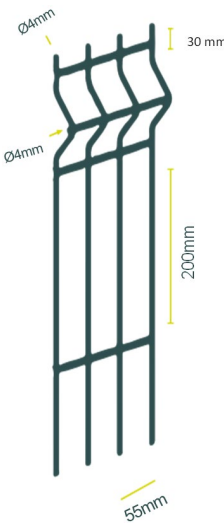
Technical characteristics:

Diameter 4mm

Width 2m

Grid 200 x 55 mm

Wire diameter	Width (M)	Colour	Height (M)	Package	PIC
4.0MM	2	RAL6005	0.6	2	
4.0MM	2	RAL6005	1	2	


Wire diameter	Width (M)	Colour	Height (M)	Package	PIC
4.0MM	2	RAL6005	1.2	2	
4.0MM	2	RAL6005	1.5	2	
4.0MM	2	RAL6005	1.7	2	
4.0MM	2	RAL6005	1.9	2	
4.0MM	2	RAL7016	0.6	2	
4.0MM	2	RAL7016	1	2	
4.0MM	2	RAL7016	1.2	2	
4.0MM	2	RAL7016	1.5	2	
4.0MM	2	RAL7016	1.7	2	
4.0MM	2	RAL7016	1.9	2	
4.0MM	2	RAL9010	0.6	2	
4.0MM	2	RAL9010	1	2	
4.0MM	2	RAL9010	1.2	2	
4.0MM	2	RAL9010	1.5	2	
4.0MM	2	RAL9010	1.7	2	
4.0MM	2	RAL9010	1.9	2	



## Installation Advice

Mark the location of the fence on the ground

- Dig a hole with a diameter of 30cm/depth of 50cm for the uprights,
- paying attention to the following center distances:

	2m column	2.5m column	PIC
Fluted column	2,04 m	2,54 m	
Column with clip	2,05 m	2,55 m	
Column	2,10 m	2,60 m	

- Position the first post, check the plumb and pour the concrete

### Fluted column

- Position the first post, check the plumb and pour the concrete

### Column with clip

- Close the lid and hang the panel on its hook
- Use mounting wedges to hold the guard net in the notches of the post

### Column with clip

### Column

- Place the guard net in the retaining ring previously placed on the cylinder
- Do the same for the second column at the other end of the panel
- Check the plumb of the second column
- Brace and pour concrete
- Remove the pads after the concrete is dry



## Rolling-screen fence


Semi-rigid barbed wire

- ▶ Optimum service life thanks to its highly adhesive plastic coating
- ▶ Combine rigidity and aesthetics to provide fencing for homes, parks and gardens

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
100×50	2.1	RAL6005	0.6	25	
100×50	2.1	RAL6005	1	25	
100×50	2.1	RAL6005	1.2	25	
100×50	2.1	RAL6005	1.5	25	
100×50	2.1	RAL6005	1.8	25	
100×50	2.1	RAL6005	2	25	
100×50	2.1	RAL7016	0.6	25	
100×50	2.1	RAL7016	1	25	
100×50	2.1	RAL7016	1.2	25	
100×50	2.1	RAL7016	1.5	25	
100×50	2.1	RAL7016	1.8	25	
100×50	2.1	RAL7016	2	25	
100×50	2.1	RAL9010	0.6	25	
100×50	2.1	RAL9010	1	25	
100×50	2.1	RAL9010	1.2	25	
100×50	2.1	RAL9010	1.5	25	
100×50	2.1	RAL9010	1.8	25	

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
100×50	2.1	RAL9010	2	25	
100×75	2.1	RAL6005	0.6	25	
100×75	2.1	RAL6005	1	25	
100×75	2.1	RAL6005	1.2	25	
100×75	2.1	RAL6005	1.5	25	
100×75	2.1	RAL6005	1.8	25	
100×75	2.1	RAL6005	2	25	
100×100	2.1	RAL6005	0.6	25	
100×100	2.1	RAL6005	1	25	
100×100	2.1	RAL6005	1.2	25	
100×100	2.1	RAL6005	1.5	25	
100×100	2.1	RAL6005	1.8	25	
100×100	2.1	RAL6005	2	25	


### Chain link fence

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
50×50	2.0/2.4/2.8/3.0	RAL6005	1	25	
50×50	2.0/2.4/2.8/3.0	RAL6005	1.2	25	
50×50	2.0/2.4/2.8/3.0	RAL6005	1.5	25	
50×50	2.0/2.4/2.8/3.0	RAL6005	1.8	25	

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
50×50	2.0/2.4/2.8/3.0	RAL6005	2	25	
50×50	2.0/2.4/2.8/3.0	RAL7016	1	25	
50×50	2.0/2.4/2.8/3.0	RAL7016	1.2	25	
50×50	2.0/2.4/2.8/3.0	RAL7016	1.5	25	
50×50	2.0/2.4/2.8/3.0	RAL7016	1.8	25	
50×50	2.0/2.4/2.8/3.0	RAL7016	2	25	
50×50	2.0/2.4/2.8/3.0	RAL9010	1	25	
50×50	2.0/2.4/2.8/3.0	RAL9010	1.2	25	
50×50	2.0/2.4/2.8/3.0	RAL9010	1.5	25	
50×50	2.0/2.4/2.8/3.0	RAL9010	1.8	25	
50×50	2.0/2.4/2.8/3.0	RAL9010	2	25	
50×50	2.0/2.4/2.8/3.0	Galvanized	1	25	
50×50	2.0/2.4/2.8/3.0	Galvanized	1.2	25	
50×50	2.0/2.4/2.8/3.0	Galvanized	1.5	25	
50×50	2.0/2.4/2.8/3.0	Galvanized	1.8	25	
50×50	2.0/2.4/2.8/3.0	Galvanized	2	25	

### Border Fence


Ideal selection for delimiting flower beds or lawns, and can also be used for fencing of individual houses


Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
		RAL6005	0.25	10	
		RAL6005	0.4	10	
		RAL6005	0.65	10	
		RAL6005	0.9	10	
		RAL7016	0.25	10	
		RAL7016	0.4	10	
		RAL7016	0.65	10	
		RAL7016	0.9	10	

### Hexagonal wire mesh

Ideal for poultry houses, aviaries or sheds, or to protect young plants

Galvanized treatment after twisting

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
<b>13×13</b>	0.7		0.5	5	
<b>13×13</b>	0.7		0.5	10	
<b>13×13</b>	0.7		0.5	25	
<b>13×13</b>	0.7		1	5	
<b>13×13</b>	0.7		1	10	
<b>13×13</b>	0.7		1	25	

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
13×13	0.7		1.2	50	
13×13	0.7		1.2	50	
20×20	0.8		1.2	50	
20×20	0.8		1.5	50	
25×25	0.8		0.5	5	
25×25	0.8		0.5	10	
25×25	0.8		0.5	25	
25×25	0.8		1	5	
25×25	0.8		1	10	
25×25	0.8		1	25	
25×25	1.0		0.5	5	
25×25	1.0		0.5	10	
25×25	1.0		0.5	25	
25×25	1.0		1	5	
25×25	1.0		1	10	
25×25	1.0		1	25	


### Welded wire mesh

Ideal for making fences for small animals, can also be used for DIY or decoration Its small welded mesh ensures the rigidity of the fence for effective protection Galvanized treatment after welding

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Length (M)	PIC
10×10	0.7-1.3	Galvanized	0.5	5	
10×10	0.7-1.3	Galvanized	0.5	10	
10×10	0.7-1.3	Galvanized	0.5	25	
10×10	0.7-1.3	Galvanized	1	5	
10×10	0.7-1.3	Galvanized	1	10	
10×10	0.7-1.3	Galvanized	1	25	
13×13	0.7-1.3	Galvanized	0.5	5	
13×13	0.7-1.3	Galvanized	0.5	10	
13×13	0.7-1.3	Galvanized	0.5	25	
13×13	0.7-1.3	Galvanized	1	5	
13×13	0.7-1.3	Galvanized	1	10	
13×13	0.7-1.3	Galvanized	1	25	
20×20	0.7-1.3	Galvanized	0.5	5	
20×20	0.7-1.3	Galvanized	0.5	10	
20×20	0.7-1.3	Galvanized	0.5	25	
20×20	0.7-1.3	Galvanized	1	5	
20×20	0.7-1.3	Galvanized	1	10	
20×20	0.7-1.3	Galvanized	1	25	

### The field fence

Ideal for fencing of farm estates and livestock areas

Opening Size (MM)	Wire diameter (MM)	Colour	Height (M)	Horizontal line	PIC
15 cm decreasing50M	Inside 1.9 mm Edge : 2.4 mm	Galvanized	0.8	8	
15 cm decreasing50M	Inside 1.9 mm Edge : 2.4 mm	Galvanized	1	8	
15 cm decreasing50M	Inside 1.9 mm Edge : 2.4 mm	Galvanized	1.2	10	
15 cm decreasing50M	Inside 1.9 mm Edge : 2.4 mm	Galvanized	1.5	12	

### barbed wire mesh

- ▶ Diameter of wire mesh: 1.5 mm
- ▶ Pin spacing : 10 cm
- ▶ Intensity: 320-340 N/mm<sup>2</sup>
- ▶ Wire Type: Galvanized mild steel






**Short piles and accessories**

**T-shaped short pile**

Single column that can be used as a starting pile, corner pile or intermediate pile

Shot peening, powder coating

Ensure longer service life in coastal areas

Cross-section (MM)	Standard finishes	Colour	Height (M)	Package	PIC
30×30	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	0.75	10	
30×30	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1	10	
30×30	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1.2	10	
30×30	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1.45	10	
30×30	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1.75	10	
30×30	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	2	10	
35×35	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	2.2	10	

<b>35×35</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	2.5	10	
--------------	---	-------------------------------	-----	----	--

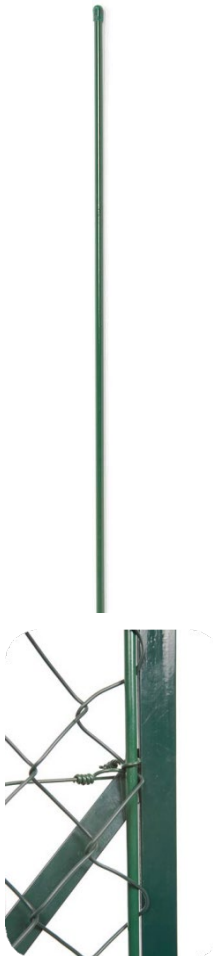
**strut**

Associated with T-pillars at each corner and every 25 meters of continuous fence


<b>Cross-section (MM)</b>	<b>Standard finishes</b>	<b>Colour</b>	<b>Height (M)</b>	<b>Package</b>	<b>PIC</b>
<b>25×25</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	0.75	10	
<b>25×25</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1	10	
<b>25×25</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1.2	10	
<b>25×25</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1.45	10	
<b>25×25</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	1.75	10	
<b>25×25</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	2	10	
<b>25×25</b>	hot dip galvanized Hot dip galvanized and powder coated	RAL6005 RAL7016 RAL9010	2.2	10	

**Drawbar**

Attaches to each end of the roll to evenly tighten the fence

	Wire diameter (MM)	Colour	Height (M)	Package	PIC
	8	RAL6005	1	10	
	8	RAL6005	1.2	10	
	8	RAL6005	1.55	10	
	8	RAL6005	1.8	10	
	8	RAL6005	2	10	
	8	RAL7016	1	10	
	8	RAL7016	1.2	10	
	8	RAL7016	1.55	10	
	8	RAL7016	1.8	10	
	8	RAL7016	2	10	
	8	RAL9010	1	10	
	8	RAL9010	1.2	10	
	8	RAL9010	1.55	10	
	8	RAL9010	1.8	10	
	8	RAL9010	2	10	

Base for short piles and struts

Colour	Name	Package	PIC
RAL6005	Fence short pile base	12	
RAL7016	Fence short pile base	12	
RAL6005	Fence strut base	12	
RAL7016	Fence strut base	12	

Accessories selection assistance

Fence height (m)	Short pile height (m)	Strut height (m)	Drawbar height (m)	The number of tension lines
0.4	0.75	0.7	1	2 or 3
0.6	1	1	1	
0.9	1.2	1.2	1	3 or 4
1	1.45	1.5	1	
1.2	1.45	1.5	1.2	4 or 5
1.5	1.75	1.75	1.5	
1.8	2.25	2.25	1.8	5 or 6
2	2.5	2.5	2	

## Tightener

The steel wire can be tensioned to ensure the rigidity of the fence

Name	Tensioner No.	Color	Package	Suggested tension line	PIC
Plastic tightener	No. 2	RAL6005	100	Green plastic Diameter 2mm to 2.4 mm	
Plastic tightener	No. 3	RAL6005	100	Green plastic Diameter 2.4mm to 2.75 mm	
Plastic tightener	No. 4	RAL6005	50	Green plastic Diameter 2.75 mm or more	
Plastic tightener	No. 2	RAL7016	100	Green plastic Diameter 2mm to 2.4 mm	
Plastic tightener	No. 3	RAL7016	100	Green plastic Diameter 2.4mm to 2.75 mm	
Plastic tightener	No. 4	RAL7016	50	Green plastic Diameter 2.75 mm or more	
Plastic tightener	No. 2	RAL9010	100	Green plastic Diameter 2mm to 2.4 mm	
Plastic tightener	No. 3	RAL9010	100	Green plastic Diameter 2.4mm to 2.75 mm	
Plastic tightener	No. 4	RAL9010	50	Green plastic Diameter 2.75 mm or more	
Hot dip galvanized tightener	No. 2	Galvanized	100	Galvanized Diameter 1.5 to 2.4 mm	
Hot dip galvanized tightener	No. 3	Galvanized	100	Galvanized Diameter 2.4 to 2.7 mm	
Hot dip galvanized tightener	No. 4	Galvanized	50	Galvanized Diameter 2.7 mm or more	

**Garden Gate**



**Barbed wire front door**

Polyesterhigh-viscosity plastic-coated steel

Columns and 2 square-section scallops

Double open direction (can be reversed)

Hardware included (bayonet, metal clad feet, stainless steel lock with euro cylinder, detent, key, stainless steel hinge, aluminium handle).

Name	Colour	Height (M)	Length (M)	PIC
barbed wire front door (2 x 1.50 m)	RAL6005	1	3	
barbed wire front door (2 x 1.50 m)	RAL6005	1.2	3	
barbed wire front door (2 x 1.50 m)	RAL6005	1.5	3	
barbed wire front door (2 x 1.50 m)	RAL6005	1.75	3	
barbed wire front door (2 x 1.50 m)	RAL6005	2	3	
barbed wire front door (2 x 2 m)	RAL6005	1	4	
barbed wire front door (2 x 3 m)	RAL6005	1.2	4	
barbed wire front door (2 x 4 m)	RAL6005	1.5	4	

barbed wire front door (2 x 5 m)	RAL6005	1.75	4	
barbed wire front door (2 x 6 m)	RAL6005	2	4	



### Slatted front door

Polyesterhigh-viscosity plastic-coated steel

Columns and 2 square-section scallops


Double open direction (can be reversed)

Hardware included (bayonet, metal clad feet, stainless steel lock with euro cylinder, detent, key, stainless steel hinge, aluminium handle).

Name	Colour	Height (M)	Length (M)	PIC
slatted front door (2 x 1.50 M)	RAL6005	1	3	
slatted front door (2 x 1.50 M)	RAL6005	1.2	3	
slatted front door (2 x 1.50 M)	RAL6005	1.5	3	
slatted front door (2 x 1.50 M)	RAL6005	1.75	3	
slatted front door (2 x 1.50 M)	RAL6005	2	3	
slatted front door (2 x 2 m)	RAL6005	1	4	
slatted front door (2 x 2 m)	RAL6005	1.2	4	
slatted front door (2 x 2 m)	RAL6005	1.5	4	
slatted front door (2 x 2 m)	RAL6005	1.75	4	
slatted front door (2 x 2 m)	RAL6005	2	4	

Standard small door


Round frame and columns, galvanized steel metal, key and lock provided.

Channel width (cm)	Overall width (m)	Color	Door height (m)	Column height (m)	PIC
87	1.05m (adjustable+/-2cm)	RAL6005	1	1.5	
87	1.05m (adjustable+/-2cm)	RAL6005	1.2	1.7	
87	1.05m (adjustable+/-2cm)	RAL6005	1.5	2	
87	1.05m (adjustable+/-2cm)	RAL6005	1.75	2.25	
87	1.05m (adjustable+/-2cm)	RAL6005	2	2.5	
87	1.05m (adjustable+/-2cm)	RAL7016	1	1.5	
87	1.05m (adjustable+/-2cm)	RAL7016	1.2	1.7	
87	1.05m (adjustable+/-2cm)	RAL7016	1.5	2	
87	1.05m (adjustable+/-2cm)	RAL7016	1.75	2.25	
87	1.05m (adjustable+/-2cm)	RAL7016	2	2.5	



Shelter door

Square frame and pillars, stainless steel metal, supplied with European key and lock.

Channel width (cm)	Overall width (m)	Color	Door height (m)	Column height (m)	PIC
100	1.18m (adjustable+/-2cm)	RAL6005	1.1	1.6	
100	1.18m (adjustable+/-2cm)	RAL6005	1.3	1.8	
100	1.18m (adjustable+/-2cm)	RAL6005	1.6	2.1	
100	1.18m (adjustable+/-2cm)	RAL6005	1.8	2.3	
100	1.18m (adjustable+/-2cm)	RAL6005	2.0	2.5	
100	1.18m (adjustable+/-2cm)	RAL7016	1.1	1.6	
100	1.18m (adjustable+/-2cm)	RAL7016	1.3	1.8	
100	1.18m (adjustable+/-2cm)	RAL7016	1.6	2.1	
100	1.18m (adjustable+/-2cm)	RAL7016	1.8	2.3	
100	1.18m (adjustable+/-2cm)	RAL6005	2.0	2.5	

### Small door accessories

Base plate for standard small doors and standard XXL large doors

Bottom plate for column 60 mm

Basic size: 150 x 100 x 200 mm

Outside diameter : 54 mm



Baseplates for garden small gates+, slatted gates and screen gates

▶ Bottom plate for square column 60 x 60 mm

▶ Basic size: 150 x 100 x 200 mm

▶ Cross-section : 54 x 54 mm



Trigger clips for rigid panels on columns

▶ Trigger clips for rigid panels on columns

▶ Fits standard small doors and standard XXL large doors

▶ Pack of 6 PVC Fastening Clamps for Rigid Panels



Starter bracket for rigid panels on square columns or walls

Suitable for all small gates including Garden Gate+, Slatted Gate and Shelter Gate.



**Nails**

**Common Nails**


Type: 1): retiform nail cap;

2): smooth nail cap;

Wire diameter: 1.60mm-6.2mm

Length: 19.05mm-180mm

Surface: uncoated, hot dipped galvanized, electro galvanized

Size	Length In	Gage No	Diam of Head	Number per Lb	PIC
2d	1	15	11/64	847	
3d	1-1/4	14	13/64	543	
4d	1-1/2	12-1/2	1/4	294	
5d	1-3/4	12-1/2	1/4	254	
6d	2	11-1/2	17/64	167	
7d	2-1/4	11-1/2	17/64	150	
8d	2-1/2	10-1/4	9/32	101	
9d	2-3/4	10-1/4	9/32	92	
10d	3	9	5/16	66	
12d	3-1/4	9	5/16	61	
16d	3-1/2	8	11/32	47	
20d	4	6	13/32	29	
30d	4-1/2	5	7/16	22	
40d	5	4	15/32	17	

Size	Length In	Gage No	Diam of Head	Number per Lb	PIC
50d	5-1/2	3	1/2	13	
60d	6	2	17/32	10	

## U Nails

Materials: strong and durable hard wire,


Low-carbon wire with hot-dip galvanized class 3 steel wire,

Zinc/aluminum coating (95% zinc, 5% aluminum).

Galvanized steel has better weatherproofing. And zinc aluminum coating providing up to twice the usable life of galvanized staples. They are ideal choice in coastal areas or regions where chemical sprays are prevalent.

Wire Diameter: 1.4mm to 5.0mm

Length: 14mm to 50mm

L (mm)	Ø (mm)	PIC
14	1.5	
16	1.8	
18	2	
20	2.0, 2.2	
23	2.2, 2.4	
25	2.4, 2.5, 3.0	
27	2.7, 3.0	
30	2.7, 3.0, 3.5,	
35	2.4, 3.0, 3.5, 4.0,	
40	3.5, 4.0, 4.5	

L (mm)	Ø (mm)	PIC
45	4.0, 4.5	
50	4.0, 4.5, 5.0	

### fence post

A single column that can be used as a start, corner, or middle column. It is associated with 2 pillars at the corners or continuous fences every 25 meters.

### "T" fence post

standard surface

Colour	Height (M)	Specification (MM)	pcs
RAL6005	0.75	30×30	10
RAL6005	1	30×30	10
RAL6005	1.2	30×30	10
RAL6005	1.45	30×30	10
RAL6005	1.75	30×30	10
RAL6005	2	30×30	10
RAL6005	2.25	35×35	10
RAL6005	2.5	35×35	10
RAL7016	0.75	30×30	10
RAL7016	1	30×30	10
RAL7016	1.2	30×30	10
RAL7016	1.45	30×30	10
RAL7016	1.75	30×30	10

Colour	Height (M)	Specification (MM)	pcs
RAL7016	2	30×30	10
RAL7016	2.25	35×35	10
RAL7016	2.5	35×35	10

#### Galvanized Surface - Hot Dip Galvanized

Colour	Height (M)	Specification (MM)	pcs
galvanized	1.2	30×30	10
galvanized	1.45	30×30	10
galvanized	1.75	30×30	10
galvanized	2	30×30	10
galvanized	2.25	35×35	10
galvanized	2.5	35×35	10

#### tension rod

Colour	Height (M)	Specification (MM)	pcs
RAL6005	1	8	10
RAL6005	1.25	8	10
RAL6005	1.55	8	10
RAL6005	1.8	8	10
RAL6005	2	8	10
RAL7016	1	8	10

Colour	Height (M)	Specification (MM)	pcs
RAL7016	1.25	8	10
RAL7016	1.55	8	10
RAL7016	1.8	8	10
RAL7016	2	8	10
galvanized	1	8	10
galvanized	1.25	8	10
galvanized	1.55	8	10
galvanized	2	8	10